



Selectric Lighting

- Energy Saving work Lamps
- Inspection Lamps
- Outdoor Garden Lighting
- Universal Low Energy Pendant
- Automatic Highlights
- T5 Super Slim Link Light Kit
- T5 Super Slim Link Light Tubes 3400K
- T4 Link Lights/Triphosphor Tubes/Leads 3400K
- Energy Saving - Compact Spirals
- Energy Saving - Mini Spirals
- Energy Saving - Candles
- Energy Saving - 2U Double loop
- Energy Saving - 3U Triple Loop
- GU10 Energy Saving Lamps
- Bathroom Shaverlight
- Striplight Fittings
- Fluorescent Starters
- Energy Saving Flood/Sign Lights
- 250W Dimming Ceiling Switch



Introduction



LGA is delighted to introduce the brand new and continually expanding range of Opulence lighting and lighting accessories.

Manufactured under the latest British and European standards with various products being backed with our in-house guarantees, you can be assured of the quality, style and durability of this range!

- Compliant with the latest British and European standards
- CE approved and marked where applicable
- Each piece 100% appearance and function tested before being released for sale
- Easy to install and use

Contents

Energy Saving Work Lamps	160	Striplight Fittings	167
Inspection Lamps	160	Fluorescent Starters	168
Outdoor Garden Lighting	161	Energy Saving Flood/Sign Lights	168
Universal Low Energy Pendant	161	250W Dimming Ceiling Switch	169
Automatic Nightlights	162		
T5 Super Slim Link Light Kit	162		
T5 Super Slim Link Light Tubes 3400K	163		
T4 Link Lights/Triphosphor Tubes /Leads 3400K	163		
Energy Saving-Compact Spirals	164		
Energy Saving-Mini Spirals	164		
Energy Saving-Candles	165		
Energy Saving-2U Double Loop	165		
Energy Saving-3U Triple Loop	166		
GU10 Energy Saving Lamps	166		
Bathroom Shaverlight	167		




Features & Benefits

- Compliant with the latest British and European standards



- CE approved and marked where applicable




- Each piece 100% appearance and function tested before being released



- Easy to install with a clean and modern design



- IP65 rated items where applicable



- 8,000 Hours Guaranteed where applicable



Technical Information

Energy Saving Work Lamps

- IP44 Rated
- Complete with cable storage

Inspection Lamps

- Ideal for use in garages, cupboards and lofts
- CE marked

Outdoor Garden lighting

- Single wall/Spoke spotlight
- IP65 rated

Universal Low Energy Pendant

- Intelligent built-in electronic gear
- Accepts lamps from 9 to 18 Watt, 2 Pin or 4 Pin

Automatic Nightlights

- Complies with BS & IEC standards
- Plug-In Nightlight automatically turns on at dusk and turns off in daylight

T5 Super Slim Link Light Kits

- Flicker free quick start light
- Ideal for use under kitchen cabinets, cupboards, shop windows and shelves

T5 Super Slim Link Tubes 3400K

- Energy efficient lamp
- CE Marked

T4 Link Lights/Triphosphor Tubes/Leads

- Ideal for use under kitchen cabinets and cupboards, bookcases and under shelves!
- Compliant with the latest BSEN standards

Energy Saving-Compact Spirals

- Colour: 2700K
- 8,000 Hours Guaranteed

Energy Saving-Mini Spirals

- Colour: 2700K
- 8,000 Hours Guaranteed

Energy Saving-Candles

- Colour: 2700K
- 8,000 Hours Guaranteed

Energy Saving-2U Double Loop

- 11 Watt Double Loop 2U
- This unit lasts 8 times longer than an ordinary lightbulb

Energy Saving-3U Triple Loop

- 20 Watt Triple Loop 3U
- Bayonet Cap Fitting B22

GU10 Energy Saving lamp

- Compliant with BS EN 60968 & BS EN 60969
- 8,000 Hrs guaranteed

Bathroom Shaverlight

- A safe and easy to install shaverlight suitable for use in bathrooms, bedrooms, cloak rooms and guest rooms.

Striplight Fittings

- Ideal for use under kitchen cabinets and cupboards, bookcases and under shelves!
- All striplight fittings are individually boxed, switched and supplied with 2m lead

Fluorescent Starters

- Compliant with BS EN 60155
- Non-flammable cap

Energy Saving Flood/Sign Lights

- ABS body and diffuser
- Pre-wired with 1 metre of flex

250W Dimming Ceiling Switch

- Suitable for 1 way light circuits
- Not suitable for fluorescent lamps

Energy Saving Work Lamps



Code No.	Description
TL240	240V - 38W 2D 3500K - IP44 2.8m flex with moulded 5 amp fused heavy duty plug
TL110	110V - 38W 2D 3500K - IP44 2.8m yellow flex with splash proof 16 amp plug (IP20)



TL240
240V - 38W 2D 3500K - IP44
2.8m flex with moulded
5 amp fused heavy duty plug

- Features:**
- IP44 Rated
 - Complete with cable storage
 - Easy grip handle
 - Tough plastic

Inspection Lamps



1401/G



1404



Code No.	Description
1401	240V - 60W B22 5m black flex with moulded 3 amp fused heavy duty plug
1401/G	240V - Gripper - 60W B22 5m black flex with moulded 3 amp fused heavy duty plug
1402	110V - 60W E27 5m yellow flex with splash proof 16 amp plug (IP44)
1403	110V - Gripper - Robust Metal Guard - 60W E27 5m yellow flex with splash proof 16 amp plug (IP44)
1404	240V - Robust Metal Guard - 60W B22 5m black flex with moulded 3 amp fused heavy duty plug
1405	110V - Robust Metal Guard - 60W E27 5m yellow flex with splash proof 16 amp plug (IP44)



1402
110V - 60W E27
5m yellow flex with splash proof 16 amp plug (IP44)

- Features:**
- Ideal for use in garages, cupboards and lofts
 - CE marked

Outdoor Garden Lighting




LFSGS
Single wall/spike spotlight

- Features:**
- IP65 rated,
 - ABS construction
 - double insulated
 - supplied with ground spike



LFPCS

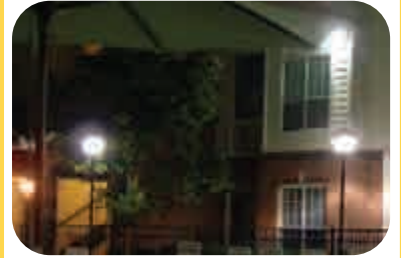


Code No.	Description
LFSGS	Single wall/spike spotlight IP65 rated, ABS construction, double insulated, supplied with ground spike
LFSUBGU10	240v GU10 garden spot IP66 rated tough plastic construction and glass front, supplied with wall bracket, spike and flex, lamp not included (Diameter: 90mm, Length: 115mm)
LFPCS	1500w photocell light controller IP65 rated, 240v 50Hz 5a inductive load, Calibrated to On @ 70 Lux, Off @ 210 Lux, tough ABS construction, 3 year guarantee (Diam: 72mm, Body Height: 98mm, Overall 125mm)

Universal Low Energy Pendant



L/E PENDANT
Energy Saving pendant

- Features:**
- Intelligent built-in electronic gear
 - Accepts lamps from 9 to 18 Watt, 2 Pin or 4 Pin
 - Comes with standard 3-plate loop-in ceiling rose and flex
 - CE marked
 - 5 Year Guarantee

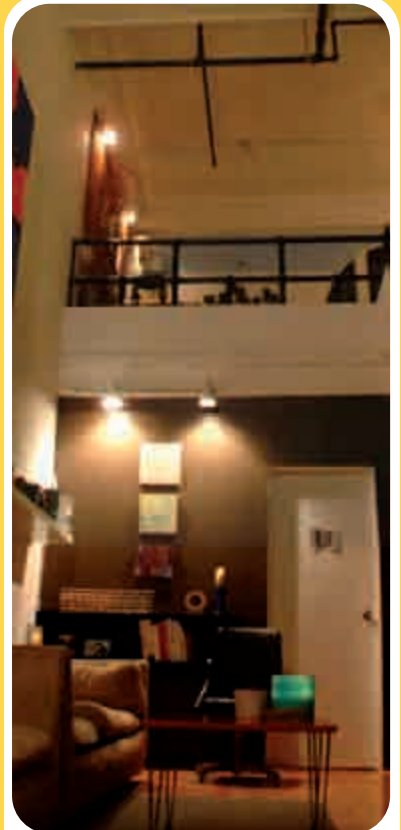

Code No.	Description
L/E PENDANT	Low Energy Pendant 6" Flex, 9-18W 2-4 Pin



LG1410PK2



Code No.	Description
LG9208	Nightlight with Photosensor
LG9208/SB	Nightlight with Photosensor & spare bulb
LG1410	Replacement night light bulb
LG1410PK2	Replacement night light bulb 2 Pack

Automatic Nightlights



LG9208/SB
Nightlight with Photosensor & spare bulb


Features:

- Complies with BS & IEC standards
- Plug-In Nightlight automatically turns on at dusk and turns off in daylight
- Complete with spare bulb
- Use only 7W (C7 E12) replacement bulbs
- Ideal for use in little childrens rooms, dark corridors, offices etc.
- CE marked

T5 Super Slim Link light kit



T5-6W

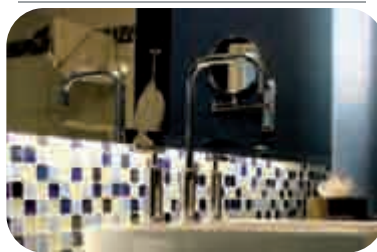

Code No.	Description
T5-6W	6W T5 energy efficient lamp, 267mm (L) x 42mm (H) x 22mm (W)
T5-8W	8W T5 energy efficient lamp, 343mm (L) x 42mm (H) x 22mm (W)
T5-14W	14W T5 energy efficient lamp, 604mm (L) x 42mm (H) x 22mm (W)
T5-18W	18W T5 energy efficient lamp, 640mm (L) x 42mm (H) x 22mm (W)
T5-21W	21W T5 energy efficient lamp, 904mm (L) x 42mm (H) x 22mm (W)
T5-24W	24W T5 energy efficient lamp, 948mm (L) x 42mm (H) x 22mm (W)
T5-28W	28W T5 energy efficient lamp, 1204mm (L) x 42mm (H) x 22mm (W)
T5-32W	32W T5 energy efficient lamp, 1250mm (L) x 42mm (H) x 22mm (W)
T5-35W	35W T5 energy efficient lamp, 1504mm (L) x 42mm (H) x 22mm (W)
LINK/250	T5 link lead 250mm



T5-35W
35W T5 energy efficient lamp

Features:

- Ideal for use under kitchen cabinets, cupboards, shop windows and shelves
- Super slim design
- Energy saving bulb included
- Flicker free quick start light
- Individually switched
- Connect up to 10 fittings together by butt and / or lead connections
- Manufactured to the latest British and European standards
- Extremely easy to install
- 5 Year Guarantee

T5 Super Slim Link Light Tubes 3400k



T14
14w tube

Features:

- Energy saving bulb
- Flicker free quick start light
- Extremely easy to install
- Manufactured to the latest British and European standards



Code No.	Description
T6	6w tube, 227mm (L) x 15mm (H) x 15mm (W) (exl pin to pin)
T8	8w tube, 300mm (L) x 15mm (H) x 15mm (W) (exl pin to pin)
T14	14w tube, 560mm (L) x 15mm (H) x 15mm (W) (exl pin to pin)
T18	18w tube, 600mm (L) x 15mm (H) x 15mm (W) (exl pin to pin)
T21	21w tube, 865mm (L) x 15mm (H) x 15mm (W) (exl pin to pin)
T24	24w tube, 910mm (L) x 15mm (H) x 15mm (W) (exl pin to pin)
T28	28w tube, 1165mm (L) x 15mm (H) x 15mm (W) (exl pin to pin)
T32	32w tube, 1205mm (L) x 15mm (H) x 15mm (W) (exl pin to pin)
T35	35w tube, 1465mm (L) x 15mm (H) x 15mm (W) (exl pin to pin)

T4 Link Light/Triphosphor Tubes/Leads 3400K



OPT4-8W
8 watt link light set

Features:

- Includes energy efficient lamp
- 2m power lead
- 500mm link lead
- Diffuser, fixing brackets & screws
- Individually switched
- Manufactured to BSEN60598-2
- 5 Year Guarantee



Code No.	Description
OPT4-8W	8 Watt Link Light Set 390x44x20mm
OPT4-12W	12 Watt Link Light Set 420x44x20mm
OPT4-16W	16 Watt Link Light Set 518x44x20mm
OPT4-20W	20 Watt Link Light Set 615x44x20mm
OPT4-30W	30 Watt Link Light Set 816x44x20mm
TUBE-8W	8W Tube 340x14x14mm
TUBE-12W	12W Tube 368x14x14mm
TUBE-16W	16W Tube 468x14x14mm
TUBE-20W	20W Tube 565x14x14mm
TUBE-30W	30W Tube 763x14x14mm
OPT4-LINK250	250mm Link Lead
OPT4-LINK500	500mm Link Lead
OPT4-LINK1000	1000mm Link Lead



CSP-20WES



Code No.	Description
B22 - 8,000 HRS	
CSP-9WBC	9W = 45W output (L) 105mm x (D)45mm
CSP-11WBC	11W = 60W output (L) 105mm x (D)45mm
CSP-15WBC	15W = 75W output (L) 110mm x (D)45mm
CSP-20WBC	20W = 100W output (L) 120mm x (D)45mm
E27 - 8,000 HRS	
CSP-9WES	9W = 45W output (L) 105mm x (D)45mm
CSP-11WES	11W = 60W output (L) 105mm x (D)45mm
CSP-15WES	15W = 75W output (L) 110mm x (D)45mm
CSP-20WES	20W = 100W output (L) 120mm x (D)45mm

Energy Saving- Compact Spiral



CSP-9WBC
9W = 45W output

Features:

- 9 Watt Fluorescent Lamp
- Choice of Cap Fitting
- Colour: 2700K
- 8,000 Hours Guaranteed
- This unit uses 80% less power consumption than an equivalent conventional lightbulb
- 8,000 Hours Guaranteed
- This unit lasts 8 times longer than an ordinary lightbulb



Energy Saving - Mini Spiral



MS-5SES

Code No.	Description
E14 - 8,000 HRS	
MS-5SES	5W = 25W output (L) 95mm x (D)35mm
MS-7SES	7W = 35W output (L) 95mm x (D)35mm
MS-9SES	9W = 45W output (L) 105mm x (D)35mm
MS-11SES	11W = 60W output (L) 105mm x (D)35mm
B15 - 8,000 HRS	
MS-5SBC	5W = 25W output (L) 95mm x (D)35mm
MS-7SBC	7W = 35W output (L) 95mm x (D)35mm
MS-9SBC	9W = 45W output (L) 105mm x (D)35mm
MS-11SBC	11W = 60W output (L) 105mm x (D)35mm
E27 - 8,000 HRS	
MS-5E	5W = 25W output (L) 95mm x (D)35mm
MS-7E	7W = 35W output (L) 95mm x (D)35mm
MS-9E	9W = 45W output (L) 105mm x (D)35mm
MS-11E	11W = 60W output (L) 105mm x (D)35mm
B22 - 8,000 HRS	
MS-5	5W = 25W output (L) 95mm x (D)35mm
MS-7	7W = 35W output (L) 95mm x (D)35mm
MS-9	9W = 45W output (L) 105mm x (D)35mm
MS-11	11W = 60W output (L) 105mm x (D)35mm



MS-5SBC
5W = 25W output

Features:

- 5W Energy Use
- Choice of Cap Fittings
- 25W Actual Output
- 80% Less Power Use
- 8,000 Hours



Energy Saving- Candles



CB-3BC
3 watt candle

Features:

- 3 Watt Candle
- Choice of Cap Fitting
- Colour: 2700K Warm White
- 8,000 Hours Guaranteed
- This unit uses 80% less power consumption than an equivalent conventional lightbulb
- This unit lasts 8 times longer than an ordinary lightbulb



Code No.	Description
B22- 8,000 HRS	
CB-3BC	3W = 15W output (L) 110mm x (D)41.5mm
CB-7BC	7W = 40W output (L) 137mm x (D)41.5mm
E27- 8,000 HRS	
CB-3ES	3W = 15W output (L) 110mm x (D)41.5mm
CB-7ES	7W = 40W output (L) 137mm x (D)41.5mm
E14- 8,000 HRS	
CB-7S	7W = 40W output (L) 137mm x (D)41.5mm


Energy Saving- 2U Double loop



DL-11ES
11W = 60W output

Features:

- Choice of Cap Fitting
- Colour: 2700K Warm White
- 8,000 Hours Guaranteed
- This unit uses 80% less power consumption than an equivalent conventional lightbulb
- This unit lasts 8 times longer than an ordinary lightbulb

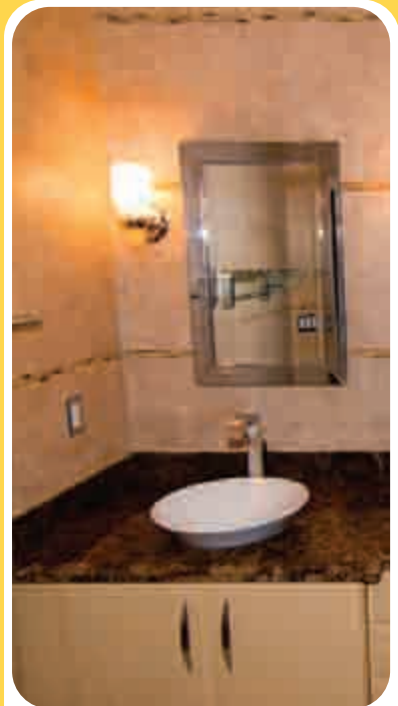

Code No.	Description
B22- 8,000 HRS	
DL-9BC	9W = 40W output (L) 131mm x (D)40mm
DL-11BC	11W = 60W output (L) 141mm x (D)40mm
E27- 8,000 HRS	
DL-11ES	11W = 60W output (L) 141mm x (D)40mm
E14- 8,000 HRS	
DL-11S	11W = 60W output (L) 141mm x (D)40mm



Code No.	Description
B22 - 8,000 HRS	
TL-20BC	20W = 100W output (L) 162mm x (D)48.5mm
E27 - 8,000 HRS	
TL-15ES	15W = 75W output (L) 145mm x (D)48.5mm

TL-20BC


20W = 100W output

Features:

- 20 Watt Triple Loop 3U
- Choice of Cap Fitting
- Colour: 2700K Warm White
- 8,000 Hours Guaranteed
- This unit uses 80% less power consumption than an equivalent conventional lightbulb
- This unit lasts 8 times longer than an ordinary lightbulb



Energy Saving- 3U Triple loop

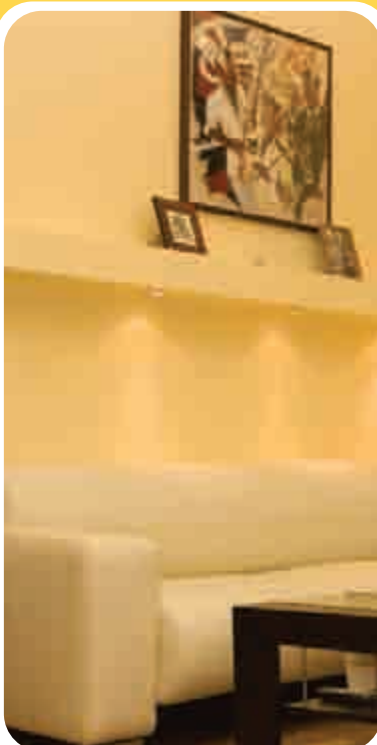

Code No.	Description
GU10-11W2700K	GU10 11 watt energy saving lamp 2700K (warm white)
GU10-11W3500K	GU10 11 watt energy saving lamp 3500K (white)
GU10-11W	GU10 11 watt energy saving lamp 6400K (daylight)

GU10-11W

GU10 11 watt energy saving lamp 6400K (daylight)

Features:

- 8,000Hrs guaranteed
- Manufactured to European Standards BS EN 60968 & BS EN 60969
- Complies to the dimensional requirements for GU10 self ballasted spotlights
- RoHS & WEEE Compliant
- 11W (Equivalent output to a tungsten halogen lamp is 60W)



GU10 Energy Saving Lamps

Colour temperature (CCT)	Kelvin
'Warm white' or 'Soft white'	≤ 3000 K
'White' or 'Bright white'	3500 K
'Cool white'	4000 K
'Daylight'	≥ 5000 K

Bathroom Shaverlight



LG9237
Bathroom Shaverlight 110/240v

Features:

- A safe and easy to install shaverlight suitable for use in bathrooms, bedrooms, cloak rooms and guest rooms.
- Shaverlight is supplied complete with tube
- Conforms to latest British and European standards
- 3 Year Guarantee
- Suitable for 284mm 60w (max) tube
- Fully diffused with pull-cord switch
- Mains isolation on removal of diffuser
- Isolating transformer rated at 20VA with a temperature and current sensor to protect against overload and / or misuse
- Shaver sockets will accept British, American, Australian and all continental plugs



Code No.	Description
LG9237	Bathroom Shaverlight 110/240v

Striplight Fittings with 2M FLEX



LG9238
Striplight Fitting 221mm / 2M

Features:

- Ideal for use under kitchen cabinets and cupboards, bookcases and under shelves!
- All striplight fittings are individually boxed, switched and supplied complete with 2 metre lead
- Compliant with the latest BSEN standards
- Individually switched
- Red neon indicator
- Double pole switch
- Double insulated
- CE marked
- Tube not supplied.
- 5 Year Guarantee



Code No.	Description
LG9238	Striplight Fitting 221mm / 2M
LG9239	Striplight Fitting 284mm / 2M

Fluorescent Starters

1406



Code No.	Description
1409	FSU 4-80 Watt Fluorescent Starter
1406	FS8 125 Watt Fluorescent Starter



1409

FSU 4-80 Watt Fluorescent Starters

Features:

- Anti-Disturbance capacitor
- Quick start, long life, safe & stable
- Start time 4s
- Energy saving
- Non-flammable cap

Energy Saving Flood/Sign Lights

PLSS-1



Code No.	Description
PLSS-1	2 X 26watt Energy saving sign lamp H 180mm, W 95mm, L 218mm
PLSS-2	2 X 26watt Energy saving sign lamp (with Photocell) H 180mm, W 95mm, L 218mm



PLSS-2

2 X 26watt Energy saving sign lamp (with photocell)
H 180mm, W 95mm, L 218mm

Features:

- ABS Body and Diffuser
- Standard and Photocell models
- Photocell Model automatically turns on at dusk and turns off at dawn
- Adjustable fixing bracket
- Energy efficient
- Pre-wired with 1 Metre of flex
- Complete with 2 x 26W PLC26 Energy Saving PL 4-pin Fluorescent Lamps
- Weatherproof to IP44


250W Dimming Ceiling Switch



DIM250
250W dimming ceiling switch
with optional chrome cover

Features:

- Suitable for 1 way light circuits
- Min. 50 Watt Max. 250 Watt - 240V Tungsten Lamp
- Min. 50 Watt Max. 175 Watt - 12V Low Voltage Lamp
- Not suitable for fluorescent lamps
- Due to the safety circuitry built into this dimmer, full brightness of all lamps controlled by it may be reduced by up to 20%

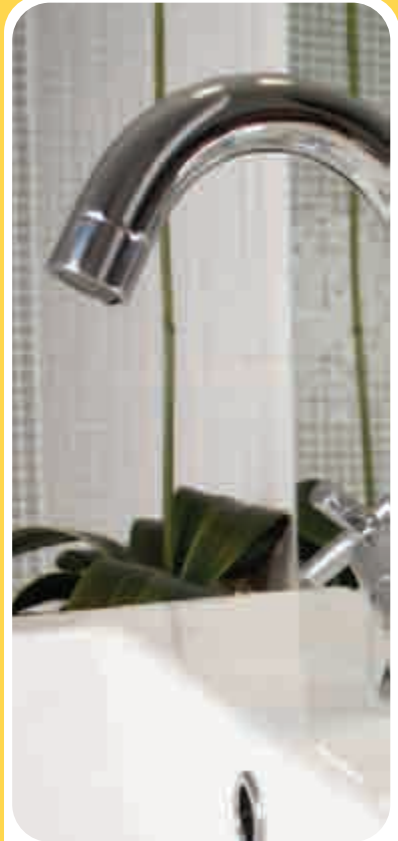

Code No.	Description
DIM250	250W dimming ceiling switch with optional chrome cover

Selectric Lighting Range

