



Data Sheet:  
**LGRCD-3**

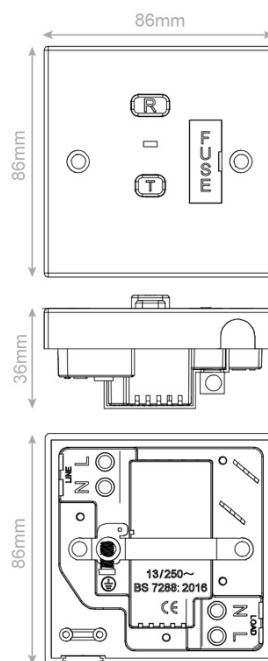

<b>Code:</b>	LGRCD-3
<b>Description:</b>	13 Amp RCD Protected Fused Connection Unit
<b>Range:</b>	Selectric Square
<b>Colour:</b>	White
<b>Ingress Protection:</b>	IP20
<b>Operating Model:</b>	Passive / latching
<b>Tripping Type:</b>	Type A
<b>Material:</b>	Polycarbonate alloy
<b>Included:</b>	Instructions
<b>Weight:</b>	0.129kg
<b>Inner Carton Quantity:</b>	10
<b>Inner Carton Weight:</b>	1.29kg
<b>Guarantee:</b>	1 Year
<b>Barcode:</b>	5025117028674
<b>Commodity Code:</b>	8536 201090
<b>Standards:</b>	BS 1363-2, BS EN 61543 & BS 7288
<b>Packaging:</b>	Poly Bag with Euro Slot
<b>Notes:</b>	<ul style="list-style-type: none"> <li>• 30mA Trip</li> <li>• Passive / latching; RCD will remain closed once set, and will only trip when a hazardous earth fault occurs</li> <li>• Rated tripping current: 30mA</li> <li>• Rated tripping time: 40mS</li> <li>• Captive screws</li> <li>• Minimum Box depth: 35mm</li> <li>• Designed to operate between -5°C and 40°C with an average value not exceeding 35°C measured over a 24hr period, &amp; an altitude no greater than 2000m above sea level</li> </ul>

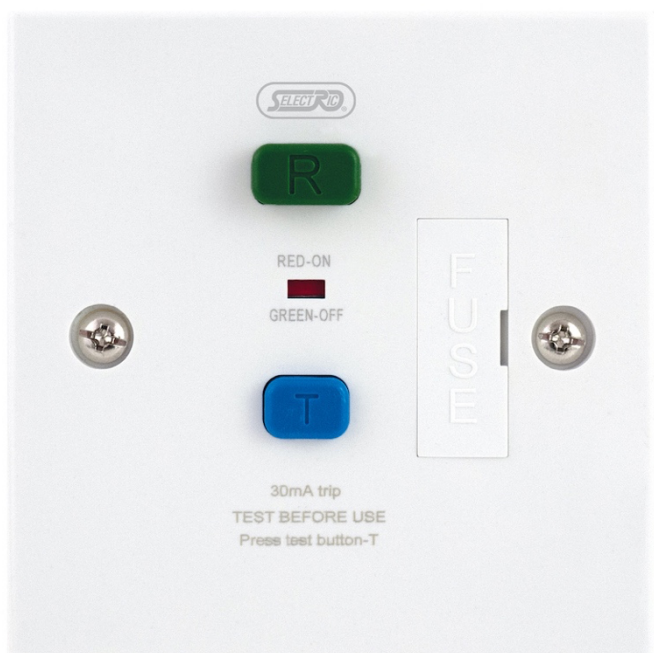

Selectric reserves the right to withdraw, improve, or modify any design without prior notification.  
 Selectric cannot be held responsible for the incorrect application / installation of any product.