
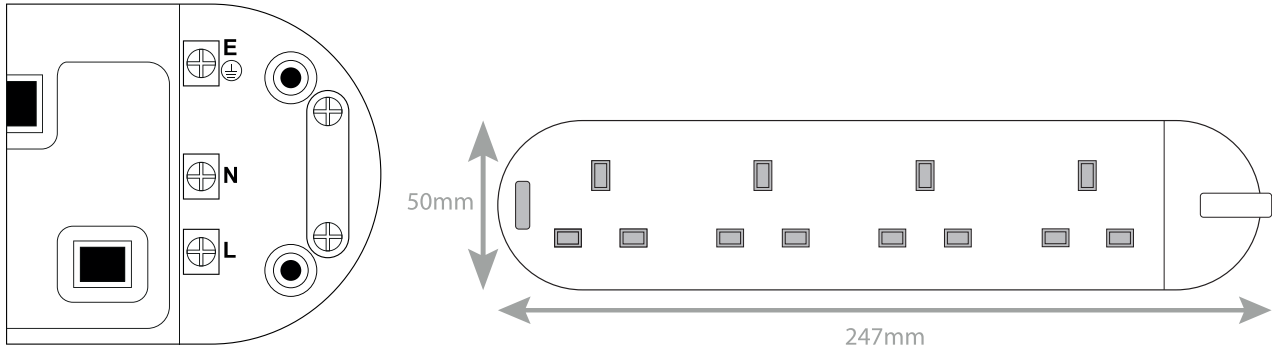


# Data Sheet : 8798B

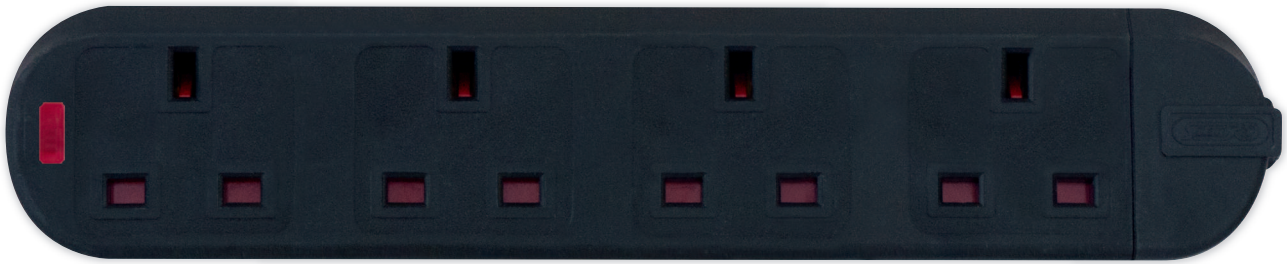

<b>Code</b>	8798B
<b>Description</b>	4 Gang 13 Amp Trailing Socket with Neon - Unswitched
<b>Size</b>	247mm x 50mm x 30mm depth
<b>Range</b>	Selectric Power & Cable Management
<b>Colour</b>	Black
<b>Max Load</b>	13 amp - 250 AC
<b>Cable Info</b>	Must be connected to a 13 amp fused plug with a 1.25mm(Sq) or 1.5mm(Sq) 3 core cable to standards BS 6500
<b>Wall Mountable?</b>	Yes - Mounting hole dimensions: 108mm apart
<b>Material</b>	Polycarbonate Body
<b>Weight</b>	0.135kg
<b>Inner Carton Qty</b>	10
<b>Inner Carton Weight</b>	1.35kg
<b>Barcode</b>	5025117187982
<b>Commodity Code</b>	85369085
<b>Standards</b>	BS 1363/A
<b>Notes</b>	<ul style="list-style-type: none"> <li>• Socket only, giving you the option to choose your own cable length</li> <li>• Wiring instructions imprinted on back of socket</li> <li>• With shutters</li> </ul>